

04/2013

Mod: DLVM-1

Production code: FLVM-1



Diamond
catering equipment

Hatco has a profitable way to create impulse food sales with the Flav-R-Fresh® Holding and Display Cabinet. Controlled moisturized heat lets you display and hold hot foods longer using minimum counter space.

FLEXIBILITY

The Flav-R-Fresh® has separate heat and humidity controls to keep crisp foods crisp and moist foods moist, not just for minutes but for hours. It holds everything from hot pretzels to 15" (381 mm) pizzas, croissants to bagels, and even hot dogs and meat pies.

Electrical components, controls, and water reservoir are located at the top for easy access. Electronic controls monitor cabinet temperature.

Models with two doors are available for pass-through convenience and a variety of merchandising racks help enhance food appeal.

The Flav-R-Fresh is ideal for restaurants, pizzerias, convenience stores, concession stands, snack bars, and kiosks.

QUALITY

The following features assure the finest performance for years to come:

- The new rounded Euro designed cabinet features tempered glass sides and door for full-view display.
- Teflon coated, incandescent light enhances food appeal while safe-guarding food products from bulb breakage.
- Single- or double-door opening models.
- Food decals and merchandising signs are available to help promote product.
- Available in *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, non-standard colors are non-returnable
- Doors are reversable (excludes self-closing door)



Model FDWD-1 with accessory 3-tier Pretzel Tree rack and accessory sign from



Model FDWD-2X with stationary 4-shelf multi-purpose rack

GRAPHIC DECALS (Adhesive)




Hot Pizza

Hot Pretzels

Designed to attract attention and stimulate sales, Flav-R-Fresh offers eye-catching food decals (Pizza, Hot Pizza, or Hot Pretzels in bright red with yellow letters)



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY,
PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY
ON ALL METAL SHEATHED AIR HEATING ELEMENTS.

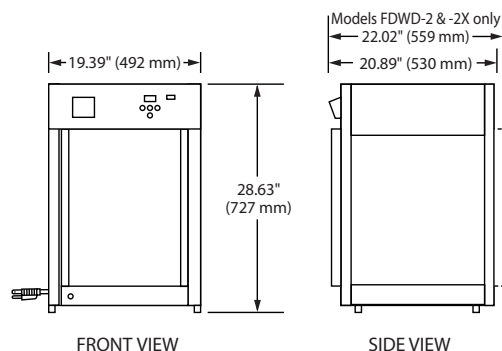

DIMENSIONS

FDWD-1, FDWD-1X: 19.39\"W x 20.89\"D x 28.63\"H*
(492 x 530 x 727 mm).

FDWD-2, FDWD-2X: 19.39\"W x 22.02\"D x 28.63\"H *
(492 x 559 x 727 mm).

* Height includes standard 1\" (25 mm) legs.

Cabinet Opening:

FDWD-1, -1X, -2, -2X: 15.75\"W x 19.75\"H (400 x 502 mm).

VOLTAGE

FDWD-1, -1X, -2, -2X: 120 volts, 60 Hz, 1390 watts, 11.6 amps
(uses NEMA 5-15P).


Export voltages available.

CORD LOCATION

FDWD-1, -1X, -2, -2X:

Facing controls, left-hand side panel, lower right corner.

PLUG CONFIGURATIONS

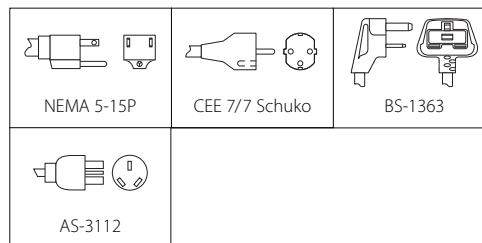

SPECIFICATIONS

Model* ^o	Type	Rack Style	Shipping Weight
FDWD-1	1 Door	Circle Rack [†] with Rack Motor	90 lbs. (41 kg)
FDWD-1X	1 Door	Multi-Purpose Rack without Rack Motor	90 lbs. (41 kg)
FDWD-2	2 Doors	Circle Rack [†] with Rack Motor	90 lbs. (41 kg)
FDWD-2X	2 Doors	Multi-Purpose Rack without Rack Motor	90 lbs. (41 kg)

* Models FDWD-1 and FDWD-2 include rack motor. Models with \"X\" designator do not have revolving display and are NOT available for retrofit.

^o Non-humidified units available, unit will only operate in dry mode.

[†] Pretzel Rack available in lieu of Circle Rack.

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.


OPTIONS (NOT FOR RETROFIT)

- ☐ Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, non-standard colors are non-returnable
- ☐ Self-closing door, in lieu of standard door. Left hinge only, not field reversible
- ☐ 6\" Sign Holder (for control side only)
- ☐ 6³/₈\", one-sided sign holder, one per side, 3 max
- ☐ 3\", 3-sided Sign Holder (FDWD-1, -1X only, signs not included)

ACCESSORIES


- ☐ 4\" (102 mm) Adjustable Legs
- ☐ 4-Tier Circle Rack with Pan Retainers (Requires motorless rack coupling on -X models)
- ☐ 4-Shelf Multi-Purpose Rack (Each shelf 13.63\"W x 12.62\"D (346 x 321 mm))
- ☐ 3-Tier Pretzel Tree (Requires rack coupling on -X models)
- ☐ Motorless Rack Coupling (For -X models only)
- ☐ Graphic Adhesive Decals (3 per set)
Pizza Photo Hot Pizza Hot Pretzel

Display Rack Selection




4-Tier Circle Rack FDW4TCR

Rack Opening:
3.25\" (83 mm)
Maximum
15\" (381 mm)
diameter pans



4-Shelf Multi-Purpose Rack* FDW4SMP

Rack Opening:
3.5\" (89 mm)



3-Tier Pretzel Tree FDW3TPT

Rack Opening:
5.88\" (149 mm)

* Accommodates half-size sheet pans (Not included).

PRODUCT SPECS

Impulse Display Cabinet

The humidity controlled Impulse Display Cabinet shall be a Flav-R-Fresh[®] Model ... rated at ... volts and ... watts, as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The cabinet shall havedoor(s), tempered glass sides, stationary rack (or revolving display), and fluorescent display light. It shall include a water reservoir, electronic controls, on-off switch, and indicating lights.


A 6' (1829 mm) cord with plug shall be attached.

Accessories shall include merchandising racks, display sign holders (signs not included), and food graphic decals.

One year on-site parts and labor warranty, plus one additional year parts-only warranty on all metal sheathed air heating elements with 24/7 parts and service assistance (U.S. and Canada only)

FLAV-R-FRESH® IMPULSE DISPLAY CABINETS

Models FDWD-1, FDWD-1X, FDWD-2, FDWD-2X

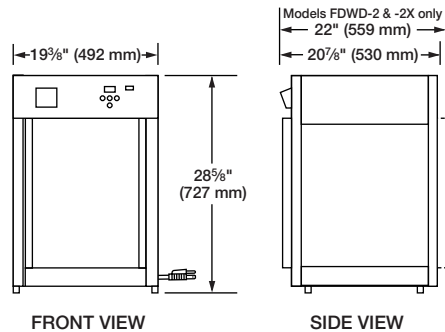

FRONT VIEW

SIDE VIEW

SPECIFICATIONS

Model*	Type	Rack Style	Shipping Weight
FDWD-1	1 Door	Circle Rack† with Rack Motor	80 lbs. (36 kg)
FDWD-1X	1 Door	Multi-Purpose Rack without Rack Motor	82 lbs. (37 kg)
FDWD-2	2 Doors	Circle Rack† with Rack Motor	86 lbs. (39 kg)
FDWD-2X	2 Doors	Multi-Purpose Rack without Rack Motor	88 lbs. (40 kg)

* Models FDWD-1 and FDWD-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

† Pretzel Rack available in lieu of Circle Rack.

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

DIMENSIONS

FDWD-1, FDWD-1X: 19 3/8"W x 20 7/8"D x 28 5/8"H (492 x 530 x 727 mm).

FDWD-2, FDWD-2X: 19 3/8"W x 22"D x 28 5/8"H (492 x 559 x 727 mm).

Cabinet Opening: 15 3/4"W x 19 3/4"H (400 x 502 mm).

VOLTAGE


120 volts, 60 Hz, 1420 watts, 11.8 amps (uses NEMA 5-15P).

Export voltages available.

CORD LOCATION

Facing controls, right-hand side panel, lower right corner.

PLUG CONFIGURATIONS

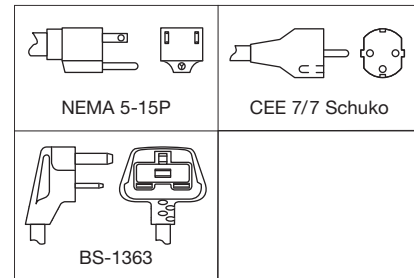


OPTIONS (NOT FOR RETROFIT)

- ☐ Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green
- ☐ Three Sided Sign Holder

ACCESSORIES


- ☐ 4-Tier Circle Rack (Requires motorless rack coupling on -X models)
- ☐ 4-Shelf Multi-Purpose Rack (Each shelf 13 5/8"W x 12 5/8"D (346 x 321 mm))
- ☐ 4-Shelf Angle Rack (Each shelf 14"W x 14 1/2"D (356 x 368 mm))
- ☐ 3-Tier Pretzel Tree (Requires motorless rack coupling on -X models)
- ☐ Motorless Rack Coupling (For -X models only)
- ☐ 4" (102 mm) Adjustable Legs with Brackets
- ☐ Merchandising Display Sign Holder
- ☐ Graphic Adhesive Decals (3 per set)
 - Pizza Photo
 - Hot Pizza
 - Hot Pretzel

Display Rack Selection




4-Tier Circle Rack Model FDWD4TCR

Rack Opening:
3 1/4" (83 mm)
Maximum
15" (381 mm)
diameter pans




4-Shelf Multi-Purpose Rack* Model FDWD4SMP

Rack Opening:
3 1/2" (89 mm)



4-Shelf Angle Rack Model FDWD4SAR

Rack Opening:
3 3/4" (95 mm)



3-Tier Pretzel Tree Model FDWD3TPT

Rack Opening:
5 7/8" (149 mm)

* Accommodates half-size sheet pans (Not included).