


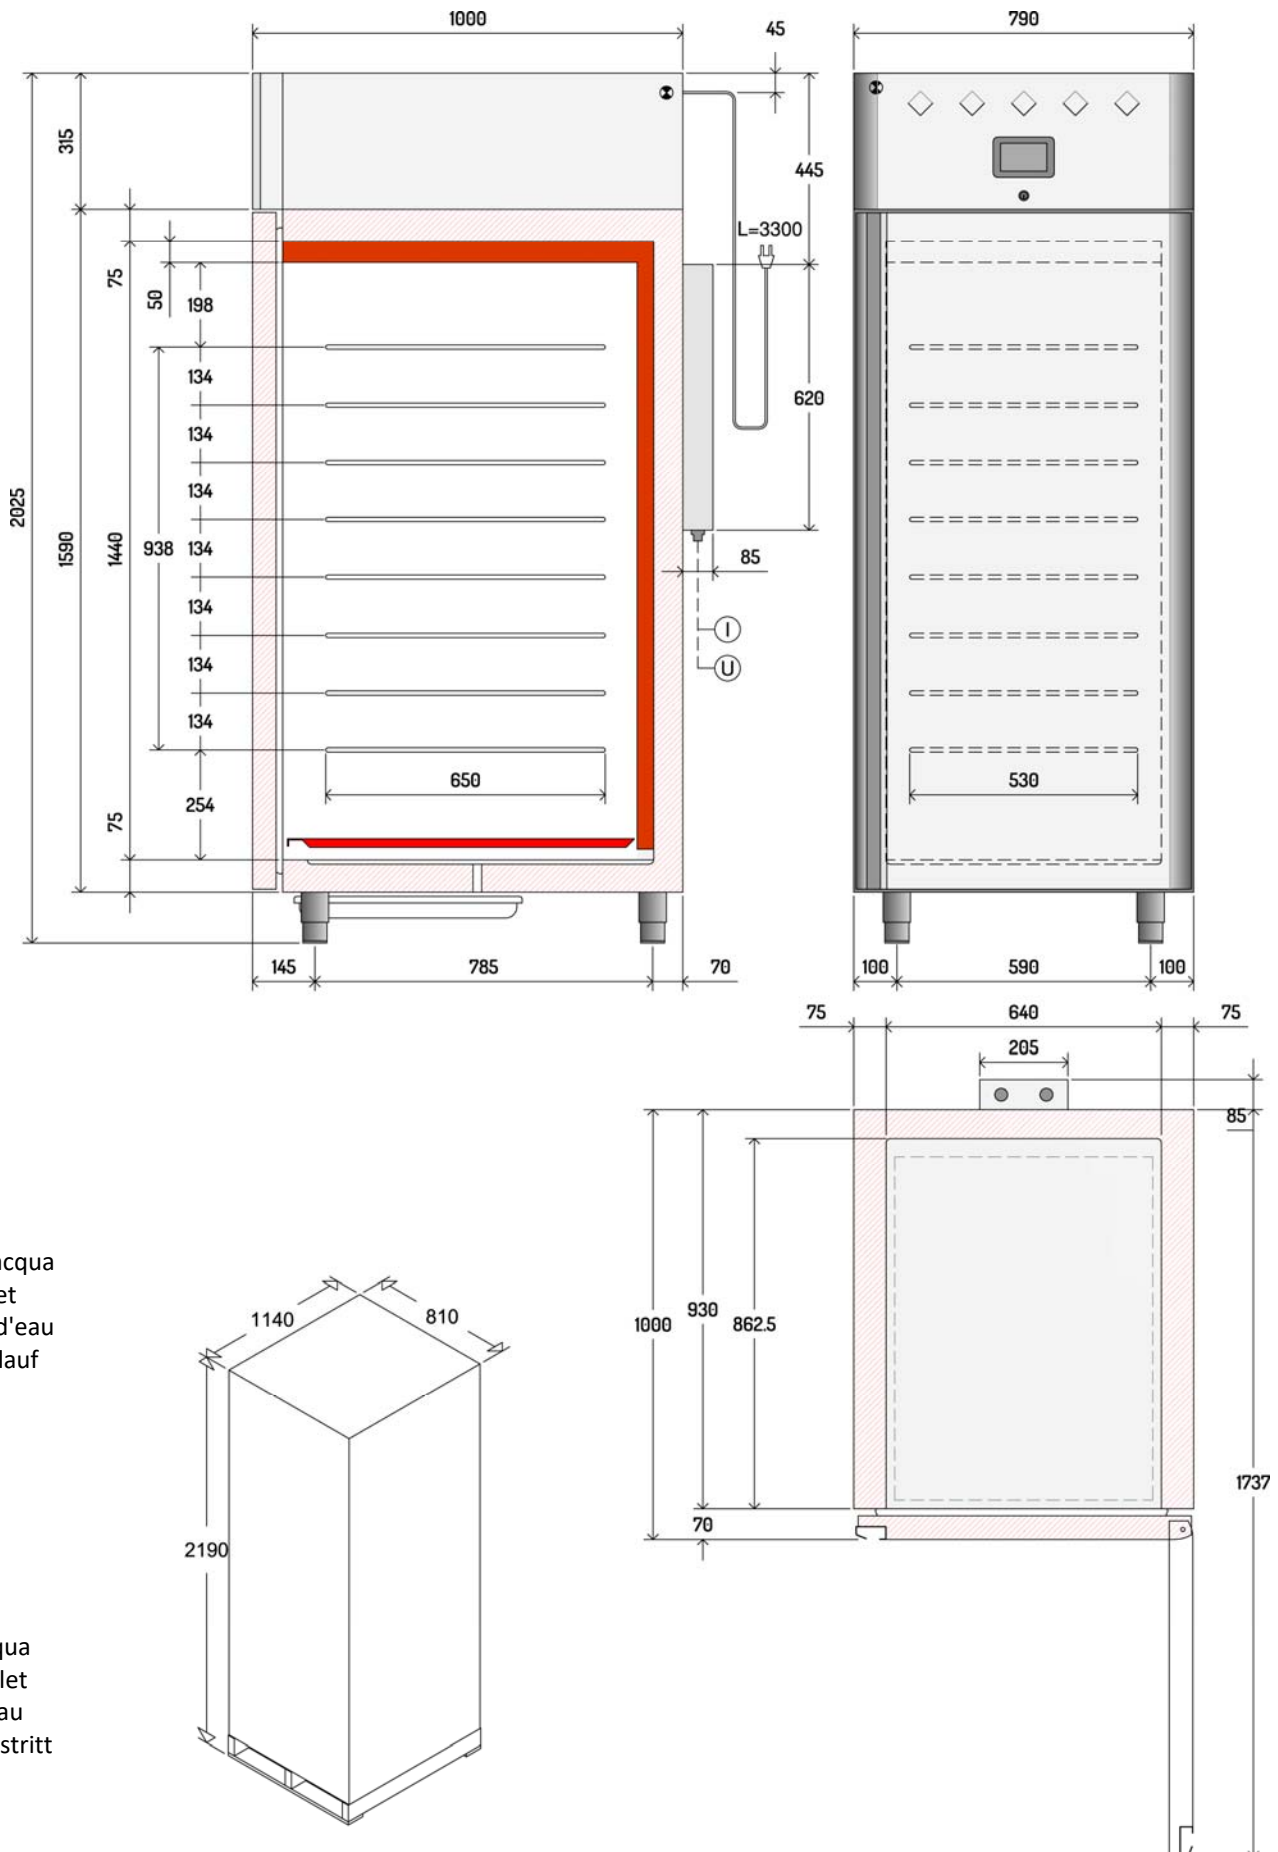
10/2021

# **Mod: AL4S/FF**

**Production code: AT68X1511-DM+KAST0002**

<p>Modello - Model - Model - Gerätetyp</p>	AL4S/FF
<p>STG</p> 	
<p><input type="checkbox"/> <b>Descrizione</b> - Description - Description - Beschreibung</p>	53 x 80 TN
<p> <b>Range</b></p>	-3°C +35°C
<p><input type="checkbox"/> <b>Funzionamento</b> - Operating Mode - Mode de fonctionnement - Betriebsmodus S = Statico - Static - Statique - Stille Kühlung V = Ventilato - Ventilated - Ventile - Umluftkühlung</p>	V
<p> <b>Capacità lorda</b> - Gross Capacity - Capacité brute - Bruttovolumen</p>	l 750
<p> <b>N° programmi</b> - N° programs - N° programmes - N° Programme</p>	20
<p><b>N° cicli</b> - N° cycles - N° cycles - N° Zyklen</p>	6
<p> <b>Dimensioni esterne</b> - External Dimension - Dimensions externes - ußenabmessungen</p>	
<p>Lunghezza - Width - Largeur - Breite</p>	mm 790
<p>Profondità / con porte aperte - Depth / with open doors Profondeur avec portes ouverte - Tiefe/mit geöffneter Tür</p>	mm 1095 / 1750
<p>Altezza - Height - Hauteur - Höhe</p>	mm 2025
<p> <b>Dimensioni interne</b> - Internal Dimension - Dimensions internes - Innenabmessungen</p>	
<p>Lunghezza - Width - Largeur - Breite</p>	mm 640
<p>Profondità - Depth - Profondeur - Tiefe</p>	mm 860
<p>Altezza - Height - Hauteur - Höhe</p>	mm 1360
<p> <b>Porte</b> - Doors - Portes - Türen</p>	1, Full
<p><b>Dotazione Standard</b> - Standard Equipment - Equipement standard - Standardausstattung</p>	8 Coppie Guide + 8 Griglie plastificate 8 pairs of slides + 8 Plastic-Coated Grids 8 glissieres + 8 Grilles Plastifées 8 paar Führungen + 8 Kunststoff-Beschichtetes Gitter
<p><b>Interasse teglie</b> - Pans pitch - Pas des bacs - Backblecheabsatz</p>	mm 67
<p><input type="checkbox"/> <b>Luce interna</b> - Internal light - Eclairage intérieure - Innerbeleuchtung</p>	●
<p> <b>Serratura</b> - Lock - Serrure - Schloss</p>	●
<p> <b>Sbrinamento</b> - Defrost - Dégivrages - Abtauen</p>	
<p>Type</p>	Electric
<p>N° Defrost in 24 hrs.</p>	6
<p>Evaporazione acqua sbrinamento - Evaporation of defrost water Evaporation eau de dégivrage - Tauwasserverdunstung</p>	Automatic Hot Gas
<p> <b>Compressor</b></p>	
<p>Model</p>	NEU6210Z
<p>Potenza - Power - Puissance - Leistung</p>	HP 1/3+
<p>T° Evaporation</p>	°C -10
<p>Potenza frigorifera - Refrigerant Power - Puissance frigorifique - Kälteleistung</p>	watt 680
<p> <b>Refrigerante</b> - Refrigerant type - Réfrigérant type - Kältemitteltyp</p>	R134a / 1430
<p><b>Quantità di refrigerante</b> - Refrigerant quantity - Quantité de réfrigérant - Kältemittelmenge</p>	gr 370
<p> <b>Classe Climatica</b> - Climate Class - Classe Climatique - Klima Classe</p>	5 40°C-40%
<p><b>Potenza Sistemi Riscaldanti</b> - Heating Power</p>	watt 700
<p><b>Potenza Generatore Vapore</b> - Steam generator power</p>	watt 40
<p> <b>Potenza assorbita REFRIGERAZIONE</b> - Power - Puissance - Leistung</p>	watt 450 / 5,2 A max
<p><b>Tensione alimentazione</b> - Supply Voltage - Tension d'alimentation - Anschlussspannung</p>	V 230V~ 50Hz
<p> <b>Noise Level</b></p>	dbA 53
<p> <b>Peso Netto</b> - Net weight - Poids net - Netto Gewicht</p>	kg 150

● = Dotazione di serie - Standard equipment - Dotation standard - Serien Ausstattung □ = Optional



I

Ingresso acqua  
Water Inlet  
D'entrée d'eau  
Wasserzulauf  
ø3/4"

U

Uscita acqua  
Water Oulet  
Sortie d'eau  
Wasseraustritt  
ø3/4"

